

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



10/512734



(43) International Publication Date
13 November 2003 (13.11.2003)

PCT

(10) International Publication Number
WO 03/093722 A1

(51) International Patent Classification⁷: F17C 7/00, 5/06,
B01D 53/00, A61M 16/00

(74) Agent: BURFORD, Anthony, F.; W.H. Beck, Greener &
Co., 7 Stone Buildings, Lincoln's Inn, London WC2A 3SZ
(GB).

(21) International Application Number: PCT/GB03/01883

(22) International Filing Date: 1 May 2003 (01.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0210022.0 1 May 2002 (01.05.2002) GB

(71) Applicant (for all designated States except US): AIR
PRODUCTS AND CHEMICALS, INC. [US/US]; 7201
Hamilton Boulevard, Allentown, PA 18195-1501 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DOWNIE, Neil,
Alexander [GB/GB]; 1 Eustace Road, Guildford, Surrey
GU4 7EB (GB). KERR, Stuart, Alexander [GB/GB]; 40
Meadow Drive, Knustford, Cheshire WA16 0DT (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: GAS DISPENSING AND RECOVERY APPARATUS

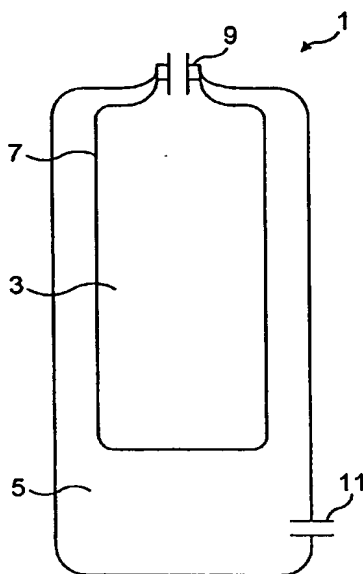

(57) Abstract: A container (1) having a first compartment (3) and a second compartment (5) separated by a movable gas impermeable partition (7) is used for storing and dispensing a gas for use in a process and receiving and storing a gas recovered from the process. Fresh gas is dispensed (9) from the first compartment (3) for use in a process and recovered gas is fed (11) to the second compartment (5), whereby a volume of the second gas displaces a volume of the first gas by movement of the partition (7) to enlarge the second compartment (5) relative to the first compartment (3).

WO 03/093722 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Gas Dispensing and Recovery Apparatus

The present invention relates to a process of and an apparatus for use in containing and dispensing gas and storing recovered gas.

5

More particularly the present invention relates to a container having two compartments divided by a flexible partition means, wherein the first compartment may be charged with a fresh gas and the second compartment may be charged with recovered gas used in a process for which the fresh gas was provided, such that the pressure of recovered gas may, at least partially, provide the driving force for dispensing the fresh gas and where the recovered gas may displace the fresh gas in the container. The invention further relates to a process for the dispensing and recovery of gas using such apparatus.

15 Containers having two compartments separated by a flexible partition are known, where a first compartment contains a liquid and a second compartment contains a propellant gas.

For example, in the brewing industry a container having a strong rubber or polypropylene outer jacket having a flexible internal bag of heavy gauge metal foil with a dual plastic coating is used. In use, the flexible inner bag contains beer which is dispensed via a tap or valve and the ullage space of the outer jacket is charged, via a charging valve, with a propellant gas such as compressed air or carbon dioxide. Thus the pressure of gas in the ullage space drives the dispensing of the beer in the flexible bag when the dispensing valve is open.

US-B-5622282 (Yazawa *et al*) discloses a double-wall aerosol container comprising a metallic outer jacket and a generally tubular flexible inner bag for containing the aerosol. The space between the outer jacket and the flexible inner bag provides a space in which the aerosol propellant may be charged via a charging valve at the base of the outer jacket. A housing integrates the outer jacket and the aerosol-containing inner bag with a dispensing valve mechanism

such that the aerosol may be dispensed through a dispensing valve by depressing a stem; the aerosol being driven through the valve by the pressure of the propellant in the outer jacket. During manufacture, once the container has been assembled, aerosol content may be charged into the inner bag via the dispensing
5 valve stem and then the propellant charged into the outer jacket via the charging valve.

EP-A-1041337 (Mannesmann) discloses a pressurised gas container for containing gaseous fuel for a vehicle and having two variable capacity
10 compartments separated by a gas-tight flexible partition made of a low thermal conductivity material. Pressurised gaseous fuel is first filled into a first of the compartments from a larger pressurised container at a gas station until the maximum, or a predetermined, temperature and pressure of the gas in the first compartment is reached. The second compartment is then filled with gas whilst at
15 the same time removing gas from the first compartment by suction. The initial warm-exchange fill into the first compartment has the effect of allowing a greater pressure of cooled gas to be fed into the container.

Hypodermic injection devices, such as that disclosed in US-B-6258063,
20 include a medication unit (a first container) which is typically made of easily deformed material such as plastic or metal foil and contains the medication to be expelled through an exiting orifice. The driving force is provided by the gas pressure in the surrounding container, generated by, for example, rapid combustion of an explosive substance. A high pressure liquid jet of medication for
25 transdermal administration can thereby be generated.

A process for dispensing fresh gas and receiving recovered gas and an apparatus for use in such a process is desirable, particularly where the gas is a high value gas and especially where the processing apparatus to which the fresh
30 gas is provided is in an environment where space is at a premium.

Accordingly, in a first aspect of the invention, there is provided a method of storing and dispensing a first gas for use in a process and receiving and storing a second gas, said method comprising the steps of storing the first gas in the first compartment of a container having a first compartment and a second compartment separated by a movable gas impermeable partition, dispensing the first gas from the first compartment of the container via a gas outlet of the container and providing the first gas to a processing apparatus for carrying out a process involving the first gas; recovering gas from said processing apparatus; and feeding at least a portion of said recovered gas to the second compartment of the container via a gas inlet of the container to provide at least a portion of the second gas, whereby a volume of the second gas displaces a volume of the first gas by movement of the partition to enlarge the second compartment relative to the first compartment.

In a second aspect of the invention, there is provided use of a container for storing and dispensing a gas for use in a process and receiving and storing a gas recovered from the process, wherein the container comprises a first compartment having a gas outlet and a second compartment having a gas inlet, said first and second compartments separated by a gas impermeable partition, wherein said partition is moveable such as to enable the relative volumes of the first and second compartment to be varied.

In a third aspect of the invention, there is provided apparatus for storing and dispensing a gas for use in a process and receiving and storing a gas recovered from the process, said apparatus comprising a container, which container comprises a first compartment for containing a first gas and having a gas outlet; a second compartment for containing a second gas and having a gas inlet; and a gas impermeable partition which separates the first compartment and the second compartment, wherein said internal partition is moveable such as to enable the relative volumes of the first and second compartments to be varied; a processing apparatus for carrying out a process involving a gas; a dispensing conduit for feeding gas from the gas outlet to the processing apparatus; a

recovery conduit for feeding gas from the processing apparatus to the gas inlet; and a pumping means for pumping the gas from the processing apparatus into the second compartment.

- 5 Usually, the container will be rigid and hence of fixed overall volume; i.e. the sum of the volumes of the first and second compartments will be constant irrespective of the relative size of those compartments.

10 It will be understood that the volume of the first compartment displaced by the recovered gas depends upon relative mass of gas in the two compartments. For example, if 10 litres NTP of fresh gas is dispensed from the first compartment of a container having a total volume of 10 litres and containing only fresh gas at 10 bar in the first compartment (i.e. empty second compartment), the pressure in the container will fall to 9 bar. If 5 litres NTP of recovered gas is then fed into the
15 second compartment, the volume of that compartment will increase (from 0) to 0.5 litres with a corresponding 0.5 litre decrease in volume of the first compartment, because the pressure within the container will increase (from 9) to 9.5 bar. If a further 45 litres of NTP fresh gas is then dispensed, the pressure within the container will fall to 5 bar, causing the volume of the second compartment to
20 increase 1 litre with a corresponding reduction in volume of the first compartment. Recovery of a further 20 litres NTP of gas to provide a container pressure of 2.5 bar would permit the remaining fresh gas (35 litres NTP) to be dispensed with the volume of the first compartment falling to 0 and the second compartment increasing to 10 litres (the volume of the container).

25

 The processing apparatus may be any apparatus requiring a supply of gas in order to carry out a process.

30 In one embodiment, the processing apparatus is a cardiopulmonary bypass oxygenator or an artificial ventilator. There may be more than one processing apparatus, in which case there may be a cardiopulmonary bypass oxygenator and

an artificial ventilator, the first gas being provided to either one or the other (or both) of the processing apparatus at any given time.

In an alternative embodiment, the processing apparatus is a gas separation
5 or purification apparatus, in which case the gas recovered from the processing
apparatus is a purified gas.

The gas recovered from the processing apparatus may be removed to a
remote location for disposal, purification or further use.

10

Preferably, at least a portion of the second gas, which preferably includes
gas recovered from the processing apparatus, is a component of the first gas, the
first gas having been through a process of the processing apparatus.

15

The recovered gas may be analysed using an appropriate analyser such
that if the recovered gas meets at least one predetermined analysed criterion,
preferably a minimum content of a particular component, it is fed into the second
compartment of the container. Otherwise, it may be vented to atmosphere or, as
an alternative, recycled through the processing apparatus.

20

Alternatively, the recovered gas is fed into the second compartment of the
container if it meets predetermined criteria in combination, such as when a
minimum content of a particular component is present and where the minimum
content set depends upon the pressure in the second compartment of the
25 container. For example, when the pressure in the second compartment
approaches its upper limit, the minimum content of a particular component of the
recovered gas that would lead to it being fed into the second compartment is
greater than when the pressure in the second compartment is lower and the
second compartment thereby has a greater remaining capacity.

30

The recovered gas is preferably fed into the second compartment using a
pump.

In a preferred embodiment of the invention, the pressure of gas in the second compartment is maintained above 1 atmosphere absolute (0.1 MPa). This should ensure that the entire content of the first compartment may be dispensed.

5 Optionally, if the pressure of gas falls below a predetermined level, a check valve will open and allow a further gas (preferably compressed air) to be pumped into the second compartment until the pressure exceeds the predetermined level.

10 Preferably the first gas comprises a high value gas which it would be beneficial to recover after use in the process. Such a gas includes the noble gases, especially xenon, krypton and neon or isotopes thereof, or stable isotopes of gases such as oxygen and carbon dioxide.

15 In a preferred embodiment, the first gas comprises xenon, preferably in an amount of at least about 10% by volume, more preferably at least about 30%, still more preferably at least about 50% and most preferably at least about 70% by volume. Most preferably, the first gas comprises xenon in an amount of about 80% by volume.

20 The first gas preferably also comprises oxygen.

In a more preferred embodiment, the first gas consists predominantly of xenon and oxygen and preferably consists solely of xenon and oxygen.

25 In a preferred embodiment, the first gas is a mixture of xenon and oxygen for dispensing to a ventilator and to a cardiopulmonary bypass oxygenator. Preferably there should be sufficient volume of the first gas in the first compartment to fill the ventilator twice and the oxygenator once, plus an additional single fill for safety. The container should therefore contain up to 20 litres of
30 xenon/oxygen mixture at a pressure of about 3 to about 4 atmospheres absolute (about 0.3 to about 0.4 MPa).

Preferably the second gas comprises xenon, preferably in an amount of at least about 5%, more preferably in an amount of at least about 10%, still more preferably in an amount of at least about 50% and most preferably about 70% by volume and especially about 80% by volume.

5

Preferably the container has a rigid housing and the partition is a flexible membrane, such as an inner lining or bag, which defines the first and second compartments where the second compartment is the ullage space in the container, outside defined between the housing and the membrane. For example,
10 the container may comprise a flexible inner bag suitable for containing a first gas which is dispensed through the gas outlet via flow control means, e.g. a tap or valve, and the ullage space is charged through the gas inlet via, for example, a charging valve, with a gas recovered from the processing apparatus to which the first gas is fed or with a propellant gas such as compressed air.

15

Suitably, the container may be of the kind used in the brewing industry and described above, in which the container is a strong rubber or polypropylene outer jacket having a flexible internal membrane of, for example, heavy gauge metal foil with a dual plastic coating dividing the housing into the first and second
20 compartments.

The apparatus and method of the present invention is particularly applicable with regard to the apparatus and method of our co-pending UK Patent Application No. 0210023.8 filed 1st May 2002 and the corresponding PCT Patent
25 Application of even date with the present application (file reference: P8944WO) in respect of a gas circulation apparatus.

The following is a description by way of example only and with reference to the accompanying drawings of presently preferred embodiments of the invention.
30 In the drawings:-

Figure 1 is a cross-sectional side view of a gas cylinder for use in the present invention;

Figure 2 is a schematic diagram of the gas container of Figure 1 when
5 attached to a process apparatus; and

Figure 3 is a diagrammatic representation of the use of gas container of Figure 1 in a gas recirculation apparatus for providing gas to a cardiopulmonary bypass oxygenator.

10

With reference to Figure 1, a gas cylinder (generally designated 1) comprises a fresh gas space 3 defined by inner foil bag 7 and an ullage space 5 consisting of the remaining internal volume of cylinder 1. The contents of the fresh gas space 3 are accessed via dispensing valve 9 and the ullage space 5 is
15 accessed via inlet valve 11.

The fresh gas to be used is dispensed through valve 9 for use in the user's process apparatus 15 (see Figure 2). Gas used in the process apparatus 15 is directed via used gas conduit 13 to analyser 17. If the used gas does not reach a
20 predetermined standard according to the analysis, it is vented through vent 19. If the predetermined standard is reached, the gas is directed through recovery conduit 21 and pump 23 pumps the recovered gas via inlet valve 11 into the ullage space 5.

25 The fresh gas in space 3 is provided at a lower pressure than pump 23 although the system is slightly pressured at all times to ensure complete evacuation of space 3 can be achieved. If desired, the initial pressure within the container can be such as to permit some recovery of gas into the ullage space prior to dispensing fresh gas. Dispensing and recovery can be continuous or
30 discrete depending upon whether or not gas is recycled for use in the process apparatus 15.

Optionally a further check valve 25 is provided to ensure a minimum pressure is provided to the ullage space 5 ensuring that the pressure of gas in the ullage space does not fall below 1 atmosphere (0.1 MPa).

5 With reference to Figure 3, a xenon/oxygen mixture in a ratio of 80% xenon to 20% oxygen is fed into the main circuit 102 of the apparatus (generally designated 101) from a xenon/oxygen supply in fresh gas space 119 of container 121 via xenon mass flow controller (MFC) 123. Container 121 is as described above with reference to and illustrated in Figure 1.

10 The oxygen content of main circuit 102 is topped up from oxygen cylinder 125 via regulator 127 and oxygen mass flow controller (MFC) 129.

One or more (preferably four) diaphragm pumps 117 pump the
15 xenon/oxygen mixture around the circuit 102 at a rate of up to 20 litres per minute (l/min) at a pressure of up to 150 millibar gauge (115 kPa).

The gaseous composition is fed to cardiopulmonary bypass (CPB) oxygenator 103 via medical device supply conduit 105, which is regulated by flow
20 control valve 139, which may be set at a desired level by the operator.

CPB oxygenator 103, which is typically a membrane oxygenator, is fed unoxygenated blood from a patient 107 via unoxygenated blood conduit 109 and returned to the patient 107 via oxygenated blood conduit 111. Spent gas from the
25 CPB oxygenator 103 is fed through spent gas return conduit 113 and then through water trap 147, primary carbon dioxide absorber 135 to return to the main circuit 102 upstream of pump(s) 117.

Gas passing through the spent gas return conduit 113 and medical device
30 supply conduit 105 pass through respective bacterial filters 115 to protect the patient 107 from contamination from the apparatus 101 and vice versa.

In order to ensure that a constant flow of gas at the set pressure is supplied to the oxygenator 103 and thus available to the patient's blood, gas circulates through the main circuit 102 via pressure maintaining valve 141 downstream from the outlet to medical device supply conduit 105. Pressure maintaining valve 141
5 is a valve which allows gas flow only when the pressure exceeds a predetermined level, for example 30 mbarg (103 kPa) and accordingly maintains a constant pressure between the pumps 17 and the valve 141.

Downstream from the pressure maintaining valve 141, the gaseous
10 composition is analysed for xenon content using ultrasonic xenon analyser 143 of the kind described in our co-pending UK Patent Application No. 0210021.2 filed 1st May 2002 and the corresponding PCT Patent Application of even date with the present application (file reference P8942WO). In an alternative arrangement (not shown) the xenon analyser is located upstream of the pressure maintaining valve
15 141.

The gas is then fed via bellows 145, which expand to take up any additional volume of gas in the apparatus or contract to compensate for loss of volume in the apparatus, and receives the spent gas upstream of pump(s) 117.
20

The oxygen concentration in the main circuit 102 is monitored by oxygen fuel cell sensor 131 that is shown situated in the main circuit 102 downstream from pump(s) 117 but could be located downstream of the pressure maintenance valve 141. The gas is then fed through backup carbon dioxide absorber 133,
25 which removes residual carbon dioxide from the recirculating gas. The carbon dioxide removed by absorbers 133 and 135 has entered via the oxygenator 103 after being flushed from the patient's blood. At least absorber 135 should be replaced with each use of the system.

30 Downstream from the backup carbon dioxide absorber 133, a small sample of gas is drawn from the main circuit 102 and fed to analyser unit 137 to be analysed for carbon dioxide, via an infra red gas analyser, to ensure that the

carbon dioxide absorbers are working efficiently and for oxygen, via a paramagnetic gas analyser, as a backup to the oxygen fuel cell sensor 131. The sample is returned to the main circuit 102 upstream from the pump(s) 117.

5 Recovery gas conduit 149 selectively feeds at least a portion of gas from the main circuit 102 at a point downstream from the backup carbon dioxide absorber 133 to the ullage space 151 of container 121, via recovery valve 153 and compressor 155.

10 An atmospheric vent 157 from bellows 145 enables the gas within the apparatus to be vented to atmosphere if desired.

 There is a U-tube relief device 159 on the spent gas return conduit 113 to protect the oxygenator 103 and patient 107 in the event of any back pressure from
15 the apparatus 101.

 Addition of fresh gas to the apparatus is controlled by an analog electronic circuit (not shown) between oxygen fuel cell sensor 131 and oxygen MFC 129 for fresh oxygen addition and by an analog electronic circuit between an ultrasonic
20 level sensor 146 measuring the position of the bellows and the xenon MFC 123 for fresh xenon/oxygen mixture addition.

 As well as monitoring the concentration of oxygen in the main circuit 102, oxygen fuel cell sensor 131 enables the oxygen concentration to be controlled.
25 The operator may choose a set point on the sensor 131 corresponding to the desired oxygen concentration. When oxygen concentration measured by sensor 131 falls below the set point, oxygen MFC 129 is triggered to feed fresh oxygen into the main circuit 102 at a rate proportional to the difference between the oxygen level set point and the oxygen sensor 131 measurement via a high gain
30 circuit connecting oxygen MFC 129 to sensor 131.

Typically, the high gain oxygen control circuit (not shown) will have a gain of 1, corresponding to an oxygen flow rate through oxygen MFC 129 and into the main circuit 102 of 1 l/min for every 1% difference between the oxygen set point and the measured oxygen level.

5

The xenon concentration of the main circuit is controlled by ultrasonic bellows level sensor 146. The operator may set the desired level on a potentiometer (not shown) connected to sensor 146, which corresponds to an expanded level of the bellows 145. This level corresponds to the volume in the system and, given that the oxygen concentration is known, to a desired concentration of xenon. When the sensor 146 detects that the bellows 145 has fallen below the desired level, xenon MFC 123 is triggered to feed fresh oxygen/xenon mixture into the main circuit 102 at a rate proportional to the difference between the potentiometer set point and the level measured by bellows sensor 146, via a low gain circuit (not shown) connecting sensor 146 to xenon MFC 123.

Typically, the xenon low gain circuit will have a gain of 0.1, corresponding to a flow of fresh xenon/oxygen mixture into the main circuit 102 of 0.1 l/min for every 1% difference between the potentiometer setpoint and the level measured by bellows sensor 146.

The various sensor readings and flow rates are displayed on a monitoring unit (not shown).

25

In use, oxygen is consumed and replaced by carbon dioxide via the CPB oxygenator 103. The operator may select the flow rate to the oxygenator 103 by using flow control valve 139. This effectively controls the rate that carbon dioxide is flushed from patient's blood into the apparatus and hence provides some control as to the relative acidity or alkalinity of the patient 107.

Carbon dioxide is absorbed by primary carbon dioxide absorber 135 and the reduction in the oxygen level is detected by fuel cell sensor 131 triggering, via the high gain circuit, replenishment of oxygen levels under the control of oxygen MFC 129.

5

Xenon sensor 143 measures the xenon concentration in the main circuit 102. This reading may be compared to other readings to reach various conclusions. For example, if the oxygen concentration measured by oxygen fuel cell sensor 131 does not equal 100 minus the xenon concentration measured by
10 xenon sensor 143, it is indicative of contamination, for example by carbon dioxide or nitrogen, and the operator may be alerted to vent the apparatus to atmosphere or recover the used gas. Alternatively, this may be done automatically at a preset level. The xenon sensor 143 is also used to monitor the xenon concentration predicted from the level of the bellows. Similarly, if these two readings do not
15 agree, this may be indicative of too much carbon dioxide, nitrogen or oxygen. As a result, the operator may again choose to vent to atmosphere or recover the used gas.

If the gas volume in the apparatus is increased, the level of bellows 145
20 increases. If the level of bellows 145 exceeds a preset level, gas is vented from the apparatus, again either manually or automatically, via atmospheric vent 157 and/or xenon recovery valve 153. Optionally, the sensor 146 may be connected to ultrasonic analyser 143 so that when the bellows 145 upper level is exceeded, vent 157 or valve 153 is selectively opened depending on the xenon content of the
25 gas measured by analyser 143.

Although illustrated and described herein with reference to certain specific embodiments, the present invention is nevertheless not intended to be limited to
30 the details shown. Rather, various modifications may be made in the details within the spirit and scope of the following claims.

CLAIMS

1. A method of storing and dispensing a first gas for use in a process and receiving and storing a second gas, said method comprising the steps of
5 storing the first gas in the first compartment of a container having a first compartment and a second compartment separated by a movable gas impermeable partition,

dispensing the first gas from the first compartment via a gas outlet of the container and providing the first gas to a processing apparatus for carrying out
10 a process involving the first gas;

recovering gas from said processing apparatus; and

feeding at least a portion of said recovered gas to the second compartment via a gas inlet of the container to provide at least a portion of the second gas, whereby a volume of the second gas displaces a volume of the first
15 gas by movement of the partition to enlarge the second compartment relative to the first compartment.

2. A method as claimed in Claim 1, wherein the container has a rigid housing with a flexible internal membrane dividing the housing into the first and
20 second compartments.

3. A method as claimed in Claim 1 or Claim 2, wherein at least a portion of the second gas is a component of the first gas.

25 4. A method as claimed in any one of the preceding claims, which further comprises the steps of analysing the recovered gas and feeding to the second compartment at least a portion of the recovered gas that satisfies at least one predetermined criterion determined by said analysis.

30 5. A method as claimed in any one of the preceding claims, wherein the pressure of gas in the second compartment is maintained above 0.1 MPa (1 atmosphere).

6. A method as claimed in any one of the preceding claims, wherein the first gas comprises a noble gas, a noble gas isotope, an isotope of oxygen or an isotope of carbon dioxide.

5

7. A method as claimed in any one of the preceding claims, wherein the first gas comprises xenon.

8. A method as claimed in Claim 7, wherein the first gas comprises
10 xenon in an amount of at least about 50% by volume.

9. A method as claimed in Claim 7 or Claim 8, wherein the first gas further comprises oxygen.

15 10. A method as claimed in Claim 9, wherein the xenon and oxygen are the sole components of the first gas.

11. A method as claimed in any one of claims 7 to 10, wherein the second gas comprises xenon.

20

12. A method as claimed in any one of the preceding claims, wherein the processing apparatus is a cardiopulmonary bypass oxygenator or an artificial ventilator.

25 13. Use of a container for storing and dispensing a gas for use in a process and receiving and storing a gas recovered from the process, wherein the container comprises a first compartment having a gas outlet and a second compartment having a gas inlet, said first and second compartments separated by a gas impermeable partition, wherein said partition is moveable such as to enable
30 the relative volumes of the first and second compartment to be varied.

14. A use as claimed in Claim 13, wherein the container has a rigid housing and the gas impermeable partition is a flexible membrane dividing the housing into the first and second compartments..

5 15. Apparatus for storing and dispensing a gas for use in a process and receiving and storing a gas recovered from the process, said apparatus comprising

a container, which container comprises

10 a first compartment for containing a first gas and having a gas outlet;

a second compartment for containing a second gas and having a gas inlet; and

15 a gas impermeable partition which separates the first compartment and the second compartment and is moveable such as to enable the relative volumes of the first and second compartments to be varied;

a processing apparatus for carrying out a process involving a gas;

a dispensing conduit for feeding gas from the gas outlet to the processing apparatus;

20 a recovery conduit for feeding gas from the processing apparatus to the gas inlet; and

a pumping means for pumping the gas from the processing apparatus into the second compartment.

25 16. An apparatus as claimed in Claim 15, wherein the container has a rigid housing with a flexible internal membrane dividing the housing into the first and second compartments..

30 17. An apparatus as claimed in Claim 15 or Claim 16, wherein the processing apparatus is an artificial ventilator.

18. An apparatus as claimed in Claim 15 or Claim 16, wherein the processing apparatus is a cardiopulmonary bypass oxygenator.

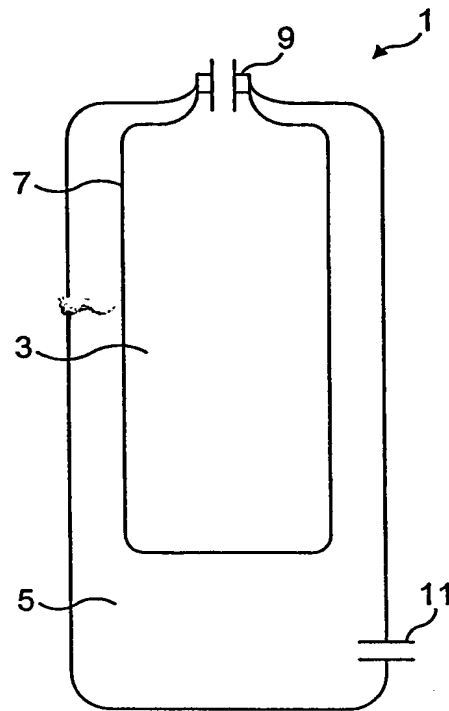


FIG. 1


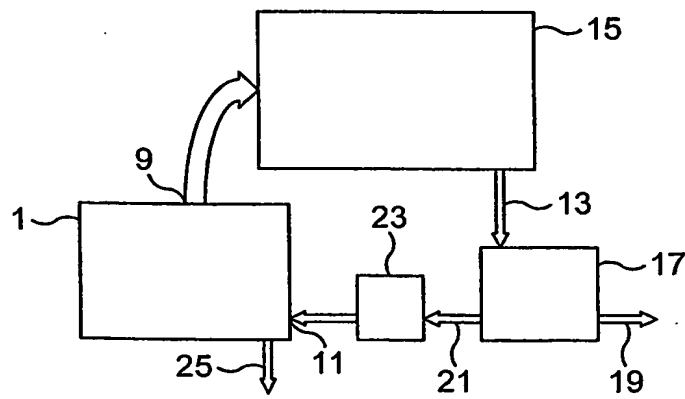


FIG. 2

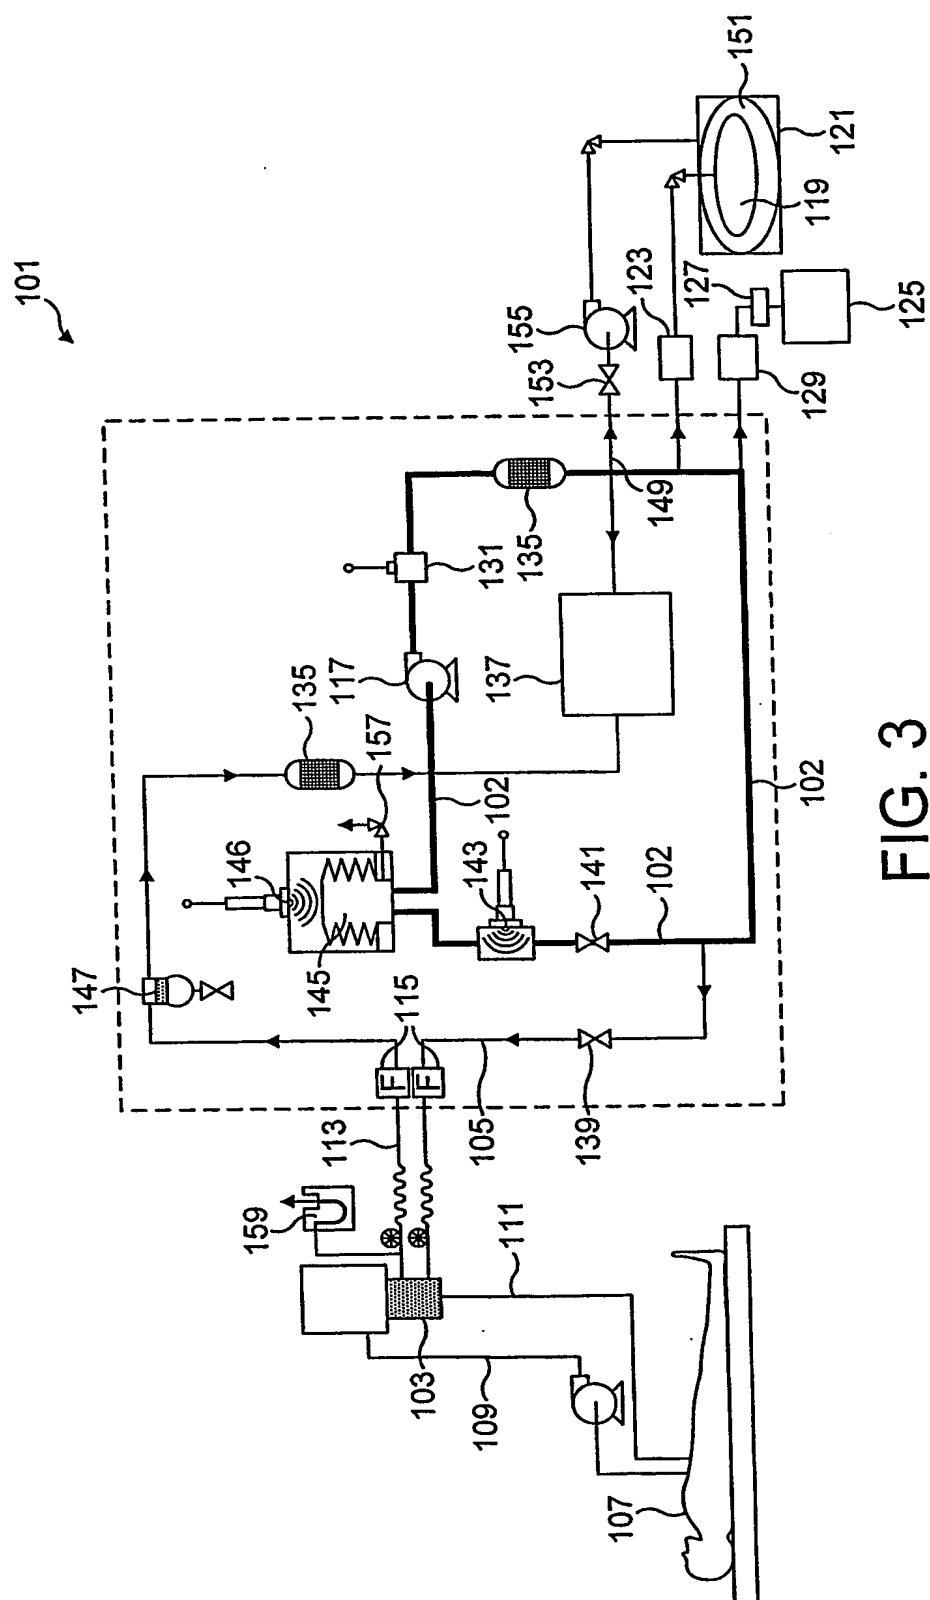

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01883

A. CLASSIFICATION OF SUBJECT MATTER		
IPC 7	F17C7/00	F17C5/06 B01D53/00 A61M16/00
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC 7 F17C B01D A61M		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the International search (name of data base and, where practical, search terms used)		
EPO-Internal, WPI Data, PAJ		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 041 337 A (MANNESMANN AG) 4 October 2000 (2000-10-04) cited in the application column 3, line 13-17 - line 23-26 column 4, line 9 - column 5, line 31 figures 1,3,4	1,2, 13-16
A	EP 0 769 304 A (SIEMENS ELEMA AB) 23 April 1997 (1997-04-23) column 4, line 47 - column 5, line 36 column 5, line 55 - column 8, line 3 column 12, line 11-13 figures 1,2	1-3,5,6, 13-17
-/-		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
25 August 2003		05/09/2003
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3018		Authorized officer Azařzia, M

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01883

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 100 21 289 A (LUDWIG BOELKOW STIFTUNG) 8 November 2001 (2001-11-08) column 3, line 19-50 column 4, line 19 -column 5, line 21 figures 1,3	1-11, 13-18
A	FR 1 547 683 A (PRONAL SA) 29 November 1968 (1968-11-29) the whole document	1-11, 13-18

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01883

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 12
because they relate to subject matter not required to be searched by this Authority, namely:
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by therapy
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01883

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 1041337	A	04-10-2000	DE	19916385 A1	12-10-2000
			EP	1041337 A2	04-10-2000
			JP	2000304194 A	02-11-2000
EP 0769304	A	23-04-1997	DE	69621397 D1	04-07-2002
			DE	69621397 T2	30-01-2003
			EP	0769304 A1	23-04-1997
			JP	9122241 A	13-05-1997
			SE	9503665 A	20-04-1997
			US	5694924 A	09-12-1997
DE 10021289	A	08-11-2001	DE	10021289 A1	08-11-2001
			AU	6205401 A	12-11-2001
			WO	0184041 A1	08-11-2001
			DE	10191681 D2	17-04-2003
			EP	1278986 A1	29-01-2003
FR 1547683	A	29-11-1968	NONE		